

# LED DIGITAL WINDOW SIGNAGE MODEL PRO 5 mm

## INFORM. ANNOUNCE. COMMUNICATE.


### Dynamic Communication


inSceneDIGITAL offers a dynamic alternative to traditional commercial window signage. Broadcast and schedule your messages, images or videos via our content based management software. Scheduling and content management is easy from any location and changes are applied to the screens immediately.

An LED digital sign installed inside your store window will be visible from more than 80 metres away, day or night. Easy to maintain, they feature low energy consumption, are protected against the risk of electrical shock and can run 24 hours a day.



**DYNAMIC COMMUNICATION TOOL**  
Dynamic signage makes it possible to adapt your messages to different markets.

**EFFECTIVE MULTI-MEDIA SOLUTION**  
Build your brand using images and videos in the same broadcast.  
Optimal return on investment and rapid results through your marketing strategy – made dynamic.

**ECONOMICAL**  
Dynamic communication allows for multiple messages to be broadcast over the life of your marketing campaign – then re-tailored to fit the next campaign. You can even test your message's performance to optimize its effectiveness.


**SIMPLE, FLEXIBLE BROADCASTING**  
Our easy-to-use management software lets you remotely plan the broadcast of your changing content in minutes.

# inSCENEDIGITAL

# TECHNICAL SPECIFICATIONS MODEL PRO 5 mm

|  |  |
|--|--|
| Model  | PRO 5 mm                                       |
| Display Area (W x H)                           | 1280 x 640 mm<br>50.39 x 25.19 in              |
| Total Dimensions (including frame) (W x H x D) | 1280 x 640 x 105 mm<br>50.39 x 25.19 x 4.13 in |
| Stackable                                      | Yes  |
| LED spacing                                    | 5 mm   |
| LED configuration                              | SMD 3.1  |
| Pixel resolution (px)                          | 256 x 128                                      |
| Colour capacity                                | 16 bits  |
| Brightness                                     | 4500 nits                                      |
| Light and Temperature sensor                   | Yes  |
| LED display dimming                            | 256  |
| Refresh rate                                   | 2000 Hz +                                      |
| Frequency                                      | 60 Hz +  |
| Colour type                                    | RGB  |
| Viewing distance                               | 5 m  |
| Viewing angle                                  | H140°, V120°                                   |
| Lifetime                                       | 100 000H+                                      |

|                           |                      |
|---------------------------|----------------------|
| Power                     | AC-110-240V          |
| Warranty (parts & labour) | 3 years              |
| Compliance                | CE-UL                |
| Maximum power consumption | 656w                 |
| Average power consumption | 265w                 |
| Working temperature       | -5/60°C<br>23/140°F  |
| Working humidity          | 10-80%               |
| Working environment       | Window interior      |
| Frame                     | Aluminum             |
| Weight                    | 80 lbs               |
| Orientation               | Portrait – landscape |
| Back Frame                | Hanging              |
| Player                    | Included             |
| Software                  | Included             |
| Communication             | Wired+wifi           |
| Speaker(s)                | Option               |

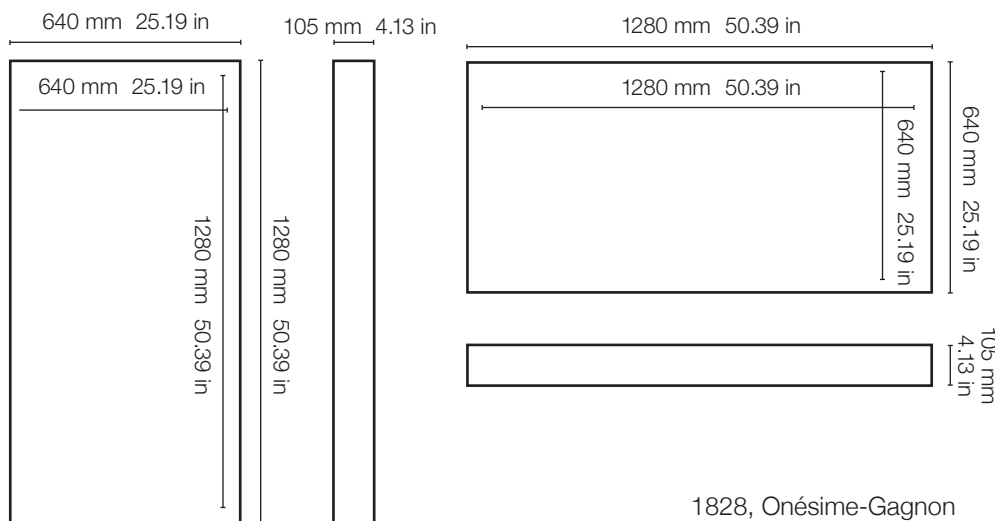

inSceneDIGITAL LED signage are distributed by Skyline Entourage and powered by Nummax.

1828, Onésime-Gagnon  
Lachine (Québec) H8T 3M6  
514.780.8810

<http://www.skylinemontreal.com/en/insceneinteractive/>

inSCENE**DIGITAL**